

方型光電開關


(Laser miniature photo sensor)

QS




型號(Model)	QS-SDU20N3		QS-SDU20P3
檢出方式 (Sensing type)	限定距離反射型(可見光) (Restricted distance Visible light)		
輸出模式 (Output method)	NPN NO/NC		PNP NO/NC
檢測物體 (Sensing object)	100*100 mm 白色 (100*100 mm white)		
發光源 (Emitting light)	紅外線 LED 850 nm (Infrared LED 850 nm)		
檢測距離 (Sensing distance)	20 cm		
反應頻率 (Response time)	1 KHz Max		
環境照度 (Ambient illumination)	白熱光 3,000 Lux 以下・太陽光 10,000 Lux 以下 (Incandescent lamp: 3,000 lux max., Sunlight: 10,000 lux max)		
迴路保護 (Protection loop)	極性迴路保護和輸出短路保護 (Load short circuit protection and no circuit protection)		
工作電壓 (Operating voltage)	10~30 VDC		
消耗電流 (Current consumption)	≤25 mA		
負載電流 (Load current)	DC24V 100 mA (Max)		
工作溼度範圍 (Ambient humidity)	35%~95% RH		
工作溫度範圍 (Operating temperature)	-25 °C~+70 °C (不結霜、不結冰)・-40 °C ~ +85 °C (保存) (-25 °C to +70 °C with no icing or condensation, -40 °C to +85 °C Storage)		
外觀材質 (Material)	PBT		
防水等級 (Protection degree)	IP65		
出線方式 (Wiring method)	耐曲線 Ø3.8 mm×2 M / 3 線 (Diameter factor Ø3.8 mm, No. of conductors 3, Length 2 m)		
重量 (Weight)	約 60 g (Approx. 60 g)		

尺寸圖(Dimensions)

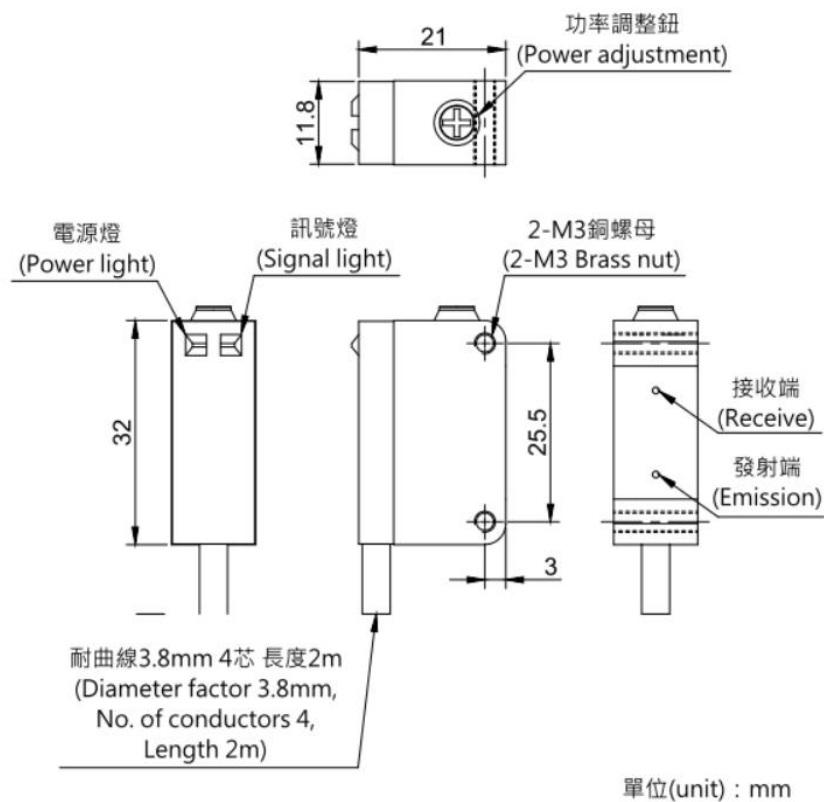

接線圖(Wiring diagrams)

輸出模式 (Output) : PNP

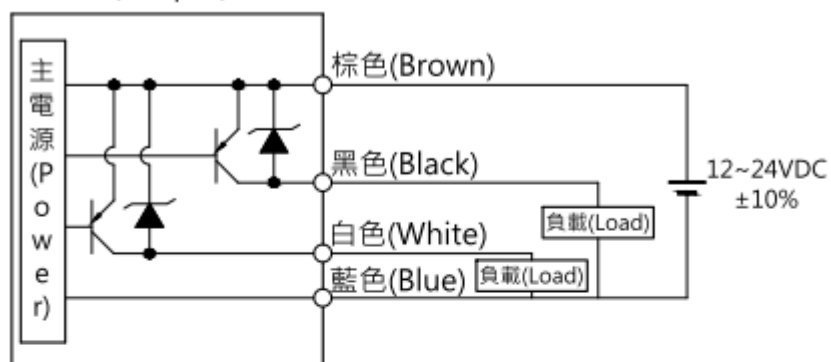

輸出模式 (Output) : NPN

